Fourth Annual Conference on Carbon Capture & Sequestration

Developing Potential Paths Forward Based on the Knowledge, Science and Experience to Date

Lessons Learned and Questions Restated
Frio Brine Pilot

Susan D. Hovorka

May 2-5, 2005, Hilton Alexandria Mark Center, Alexandria Virginia

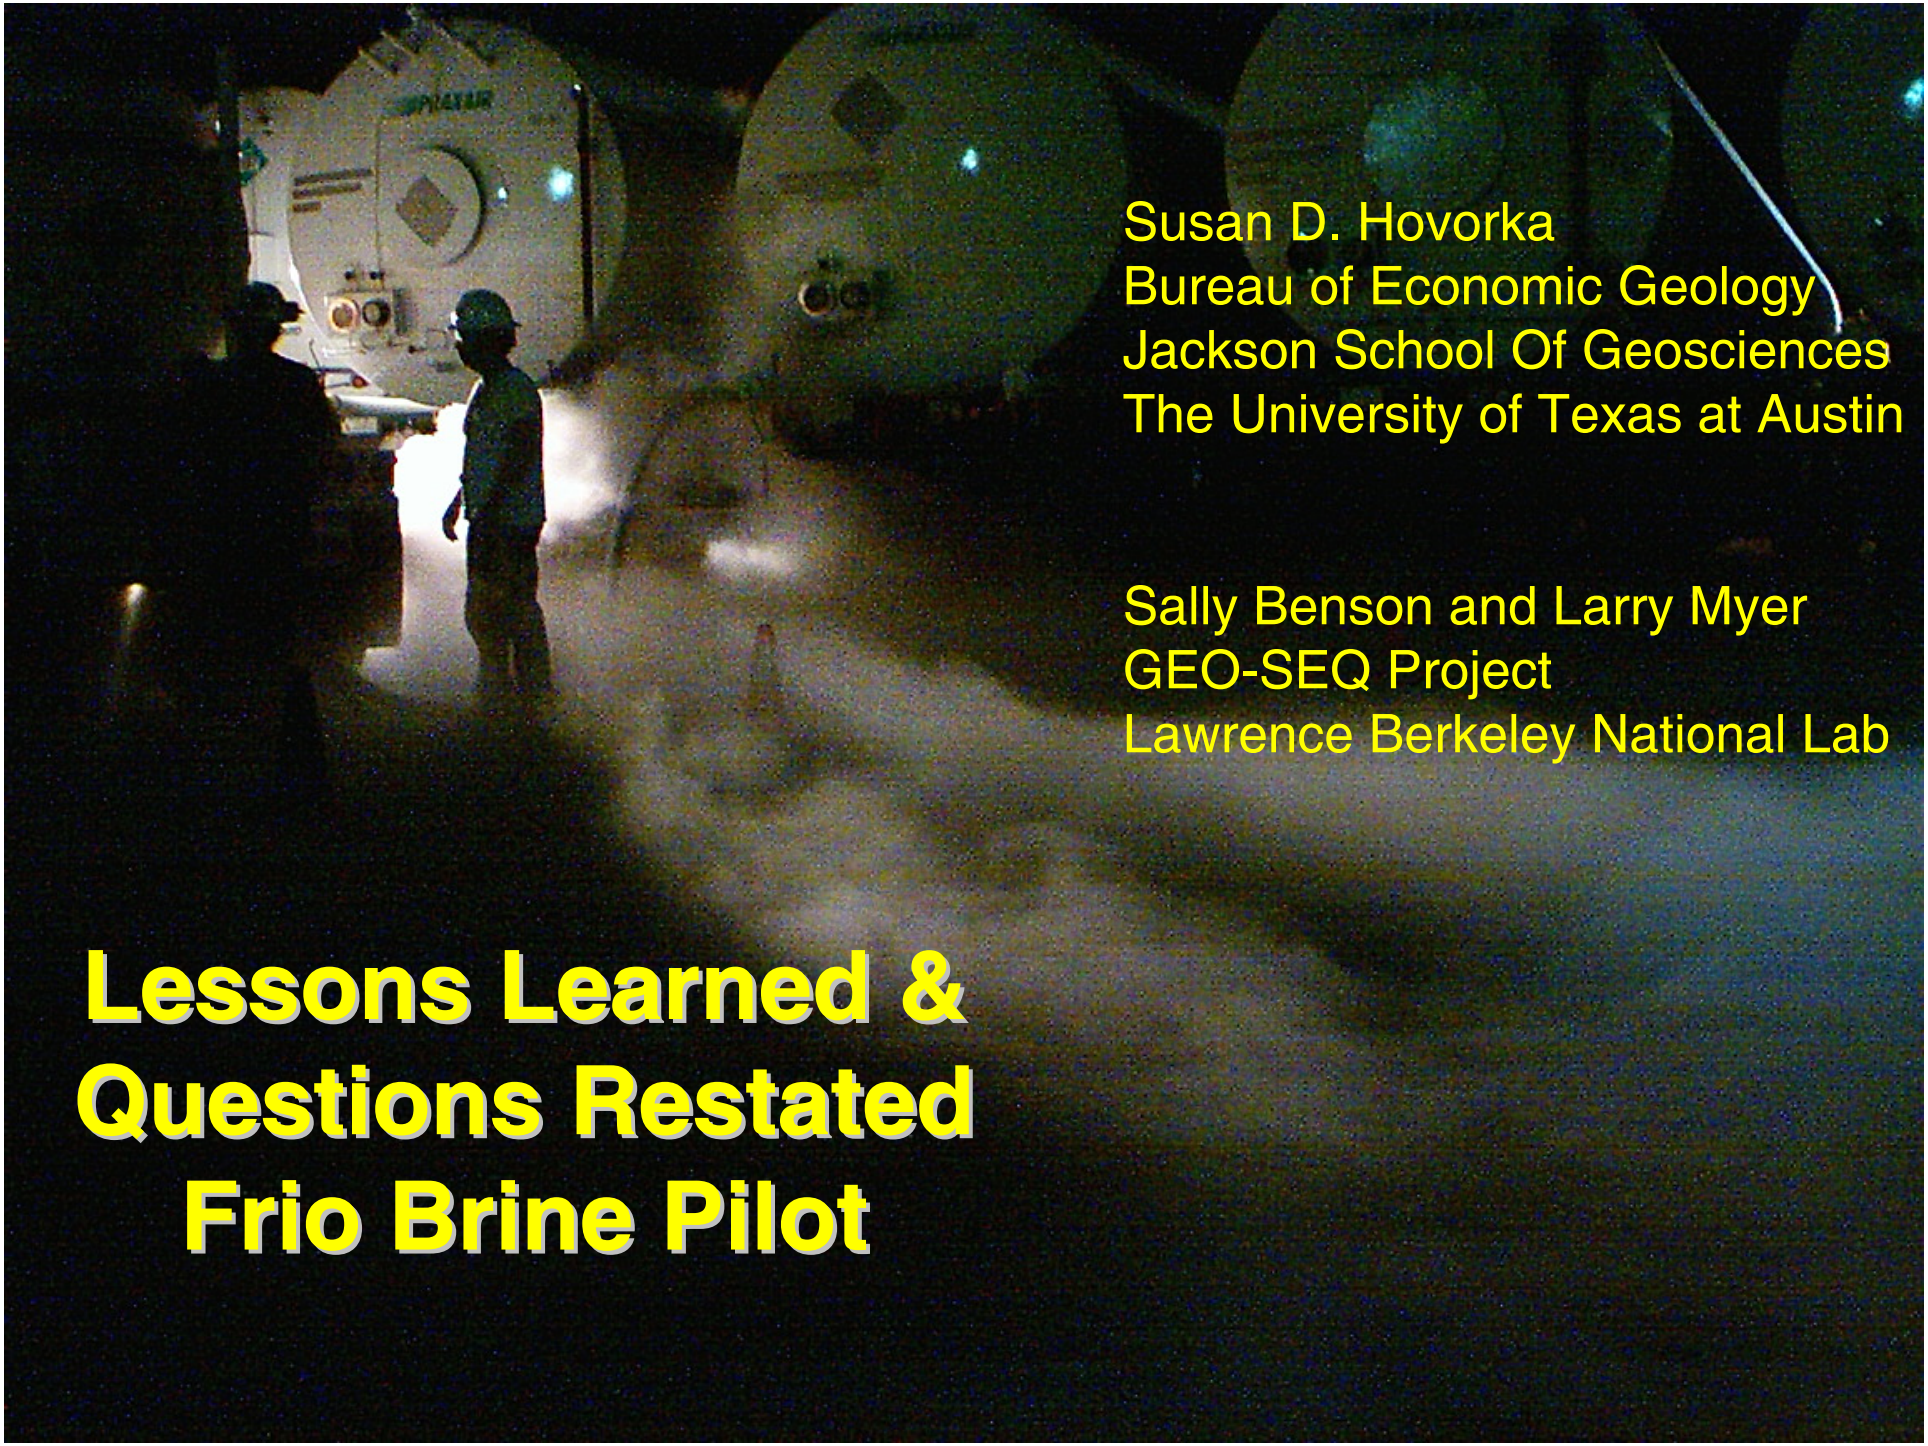

Lessons Learned & Questions Restated Frio Brine Pilot

Susan D. Hovorka
Bureau of Economic Geology
Jackson School Of Geosciences
The University of Texas at Austin

Sally Benson and Larry Myer
GEO-SEQ Project
Lawrence Berkeley National Lab

Modeling for proposal, during design, and to assess results

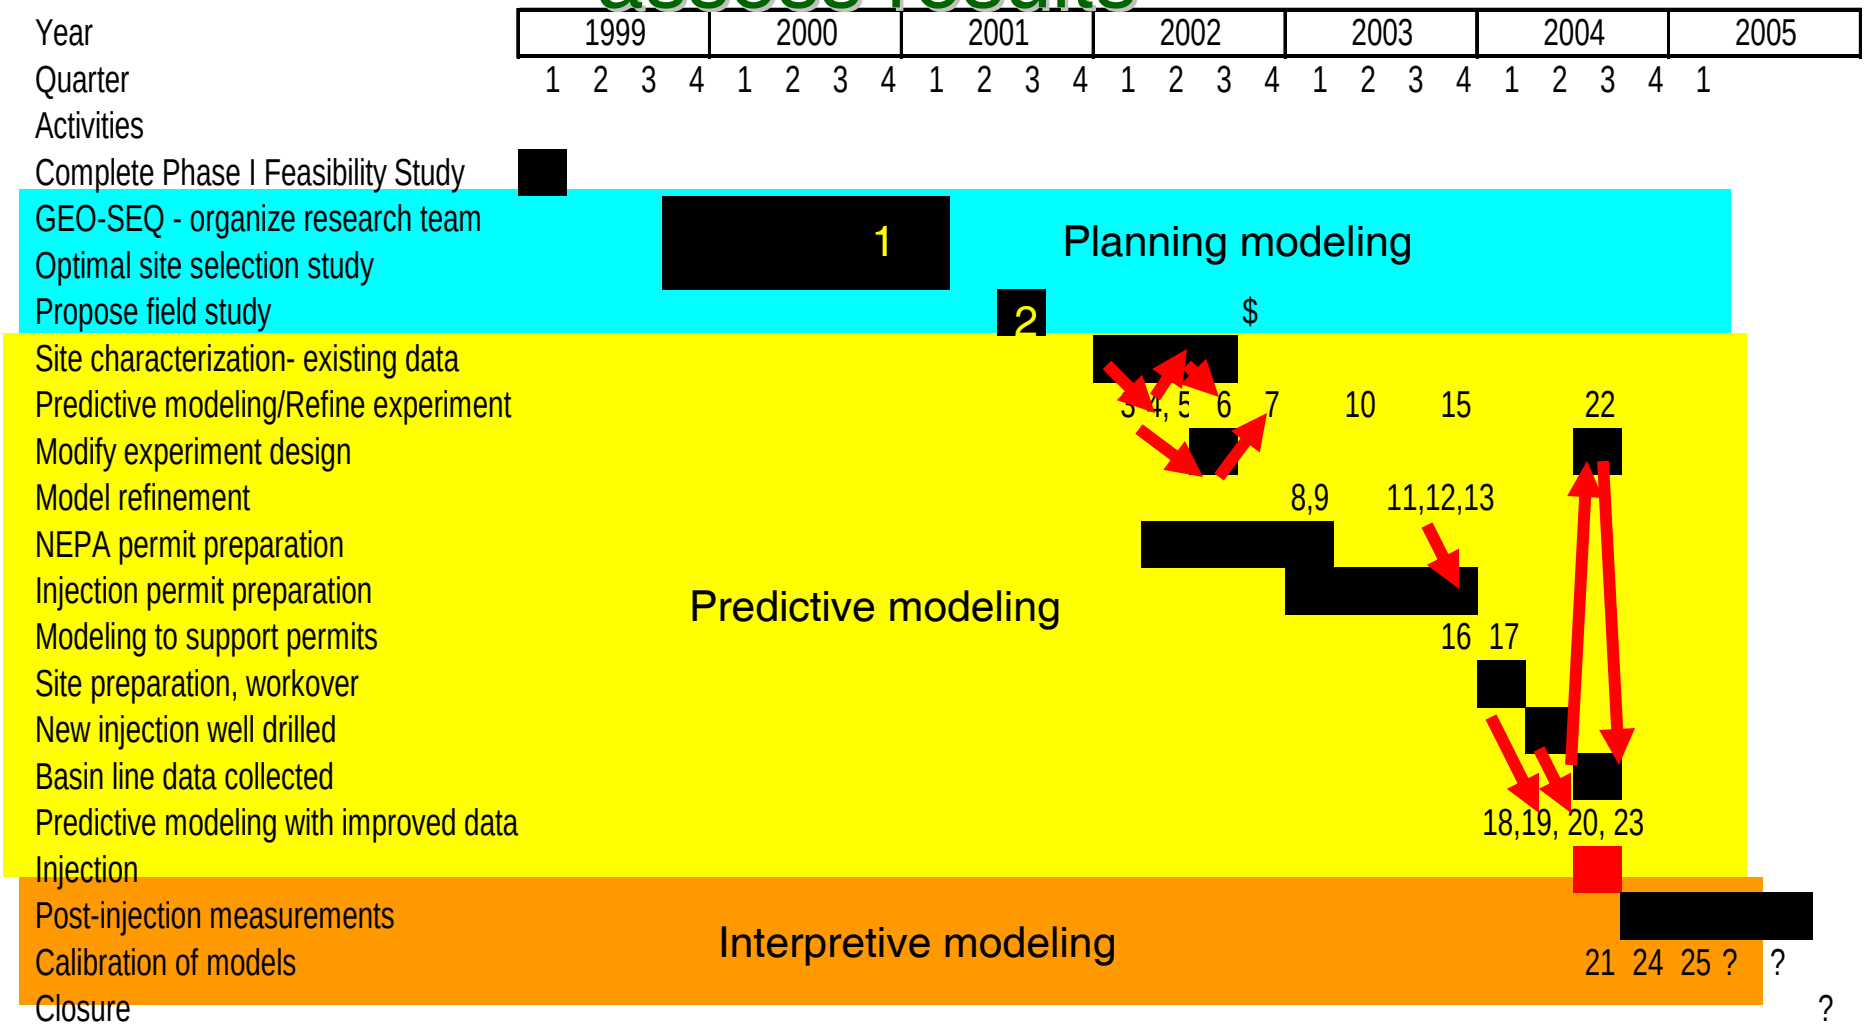

1-25 TOUGH2 model sets, Christine Doughty, LBNL

Simple Characterization for Proposal

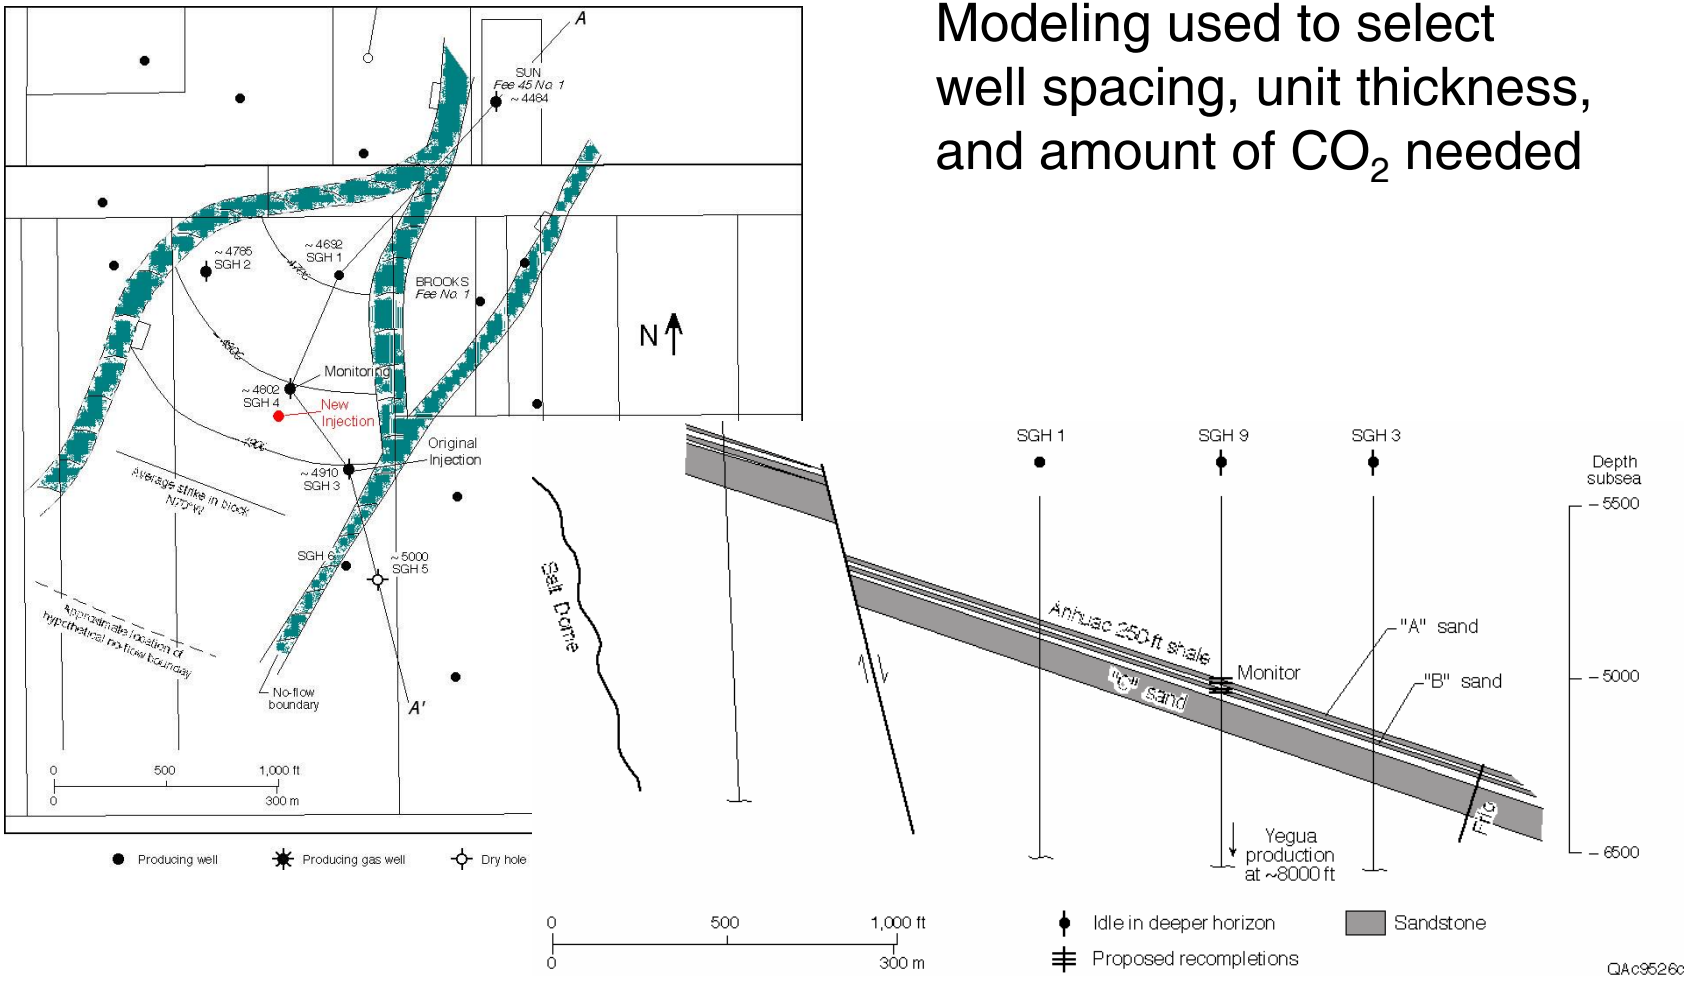

Modeling used to select well spacing, unit thickness, and amount of CO_2 needed

Will CO2 arrive?

Experimental design interaction with geologic uncertainties

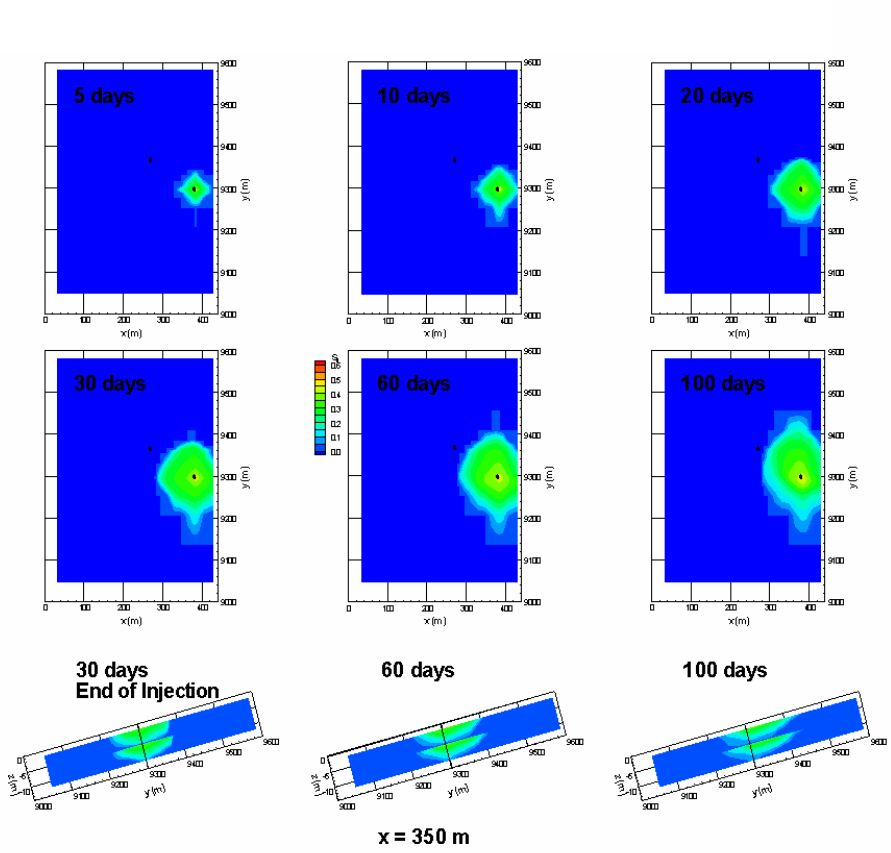

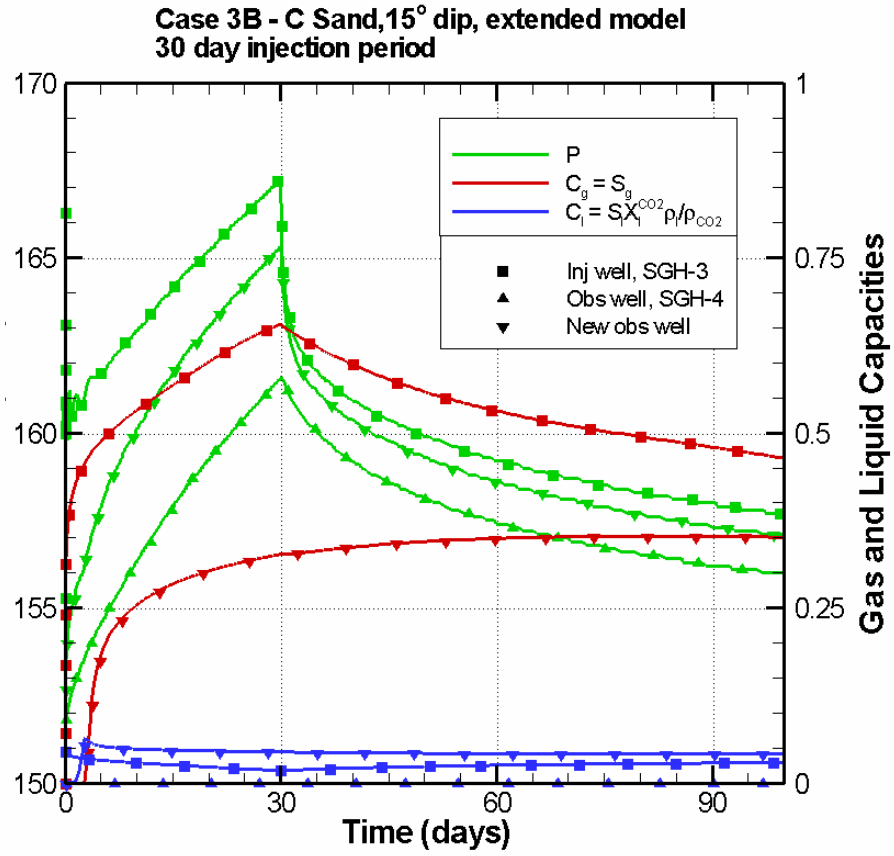

2/2/03

How Modeling and Monitoring Demonstrate Permanence

Residual gas saturation of 5%

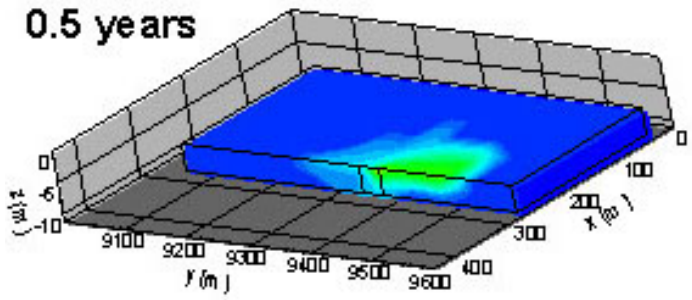

Residual gas saturation of 30%

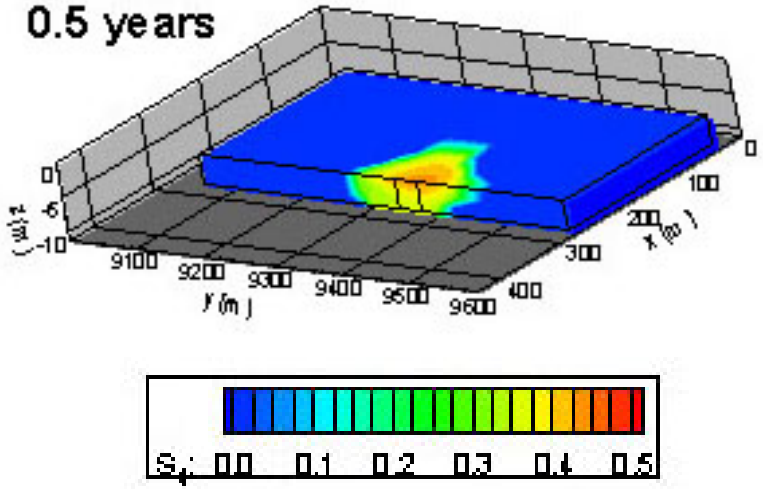

- Modeling has identified variables which appear to control CO_2 injection and post injection migration.
- Measurements made over a short time frame and small distance confirm the correct value for these variables
- Better conceptualized and calibrated models will now be used to develop larger scale longer time frame injections

TOUGH2 simulations
C. Doughty LBNL

Predicted Saturation for History Match – Sensitivity to Residual Saturation

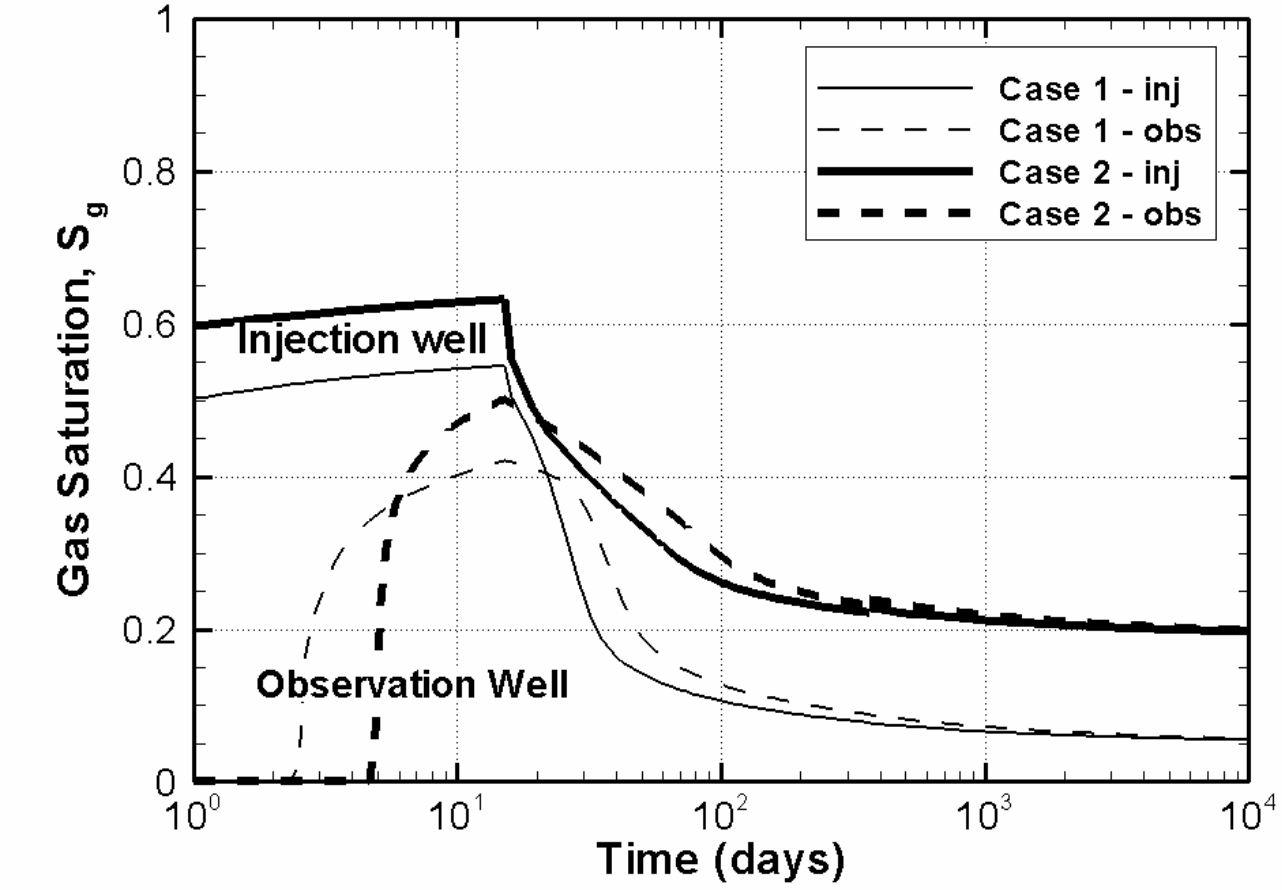

Case 1 Slr=0.30; Sgr=0.05

Case 2; Slr varies, ~ 0.10, Sgr varies, ~0.25

TOUGH2 model

Modeled Long-term Fate
30 years based on observed post-injection saturation

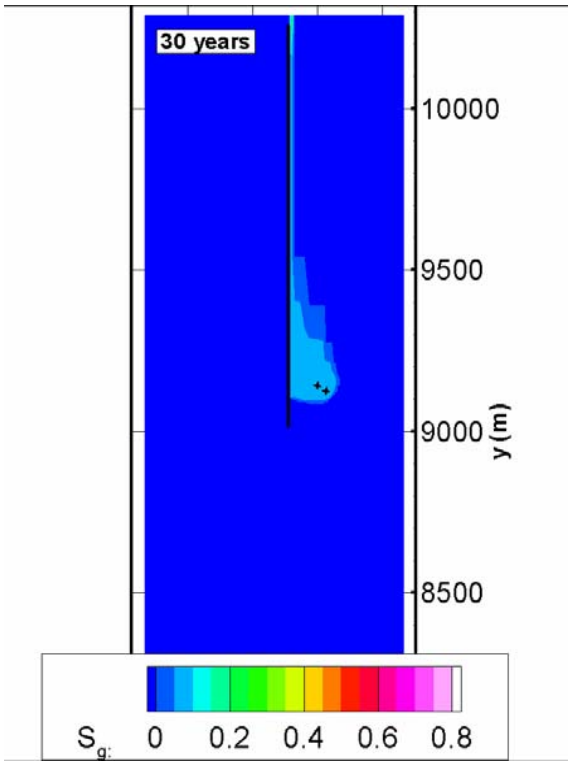

Minimal Phase trapping

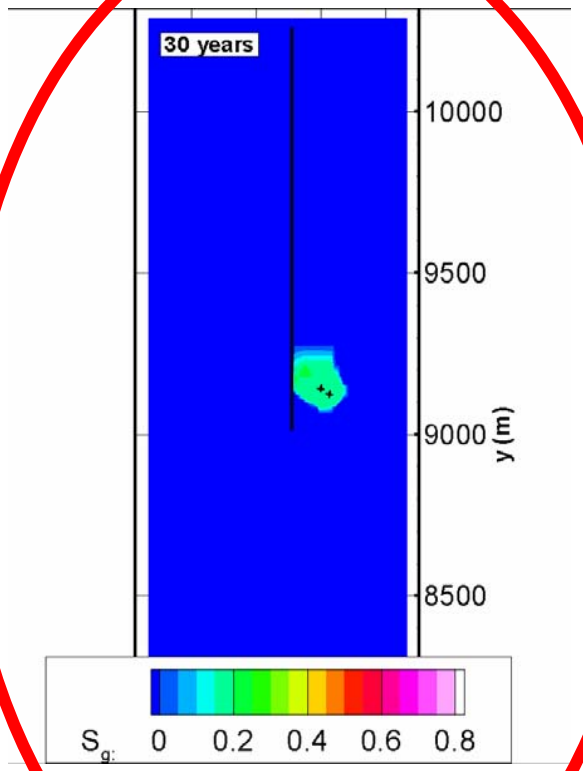

Predicted significant phase trapping

Define Clear and Achievable Goals

Project Goal: Early success in a high-permeability, high-volume sandstone representative of a broad area that is an ultimate target for large-volume sequestration.

- **Demonstrate that CO_2 can be injected into a brine formation without adverse health, safety, or environmental effects**
- **Determine the subsurface distribution of injected CO_2 using diverse monitoring technologies**
- **Demonstrate validity of conceptual and numerical models**
- **Develop experience necessary for success of large-scale CO_2 injection experiments**
- **Does not say assure storage of CO_2 for long periods of time, or measure distribution with high precision, or not leak, or do it at low cost.**

Usefulness of a two well-design

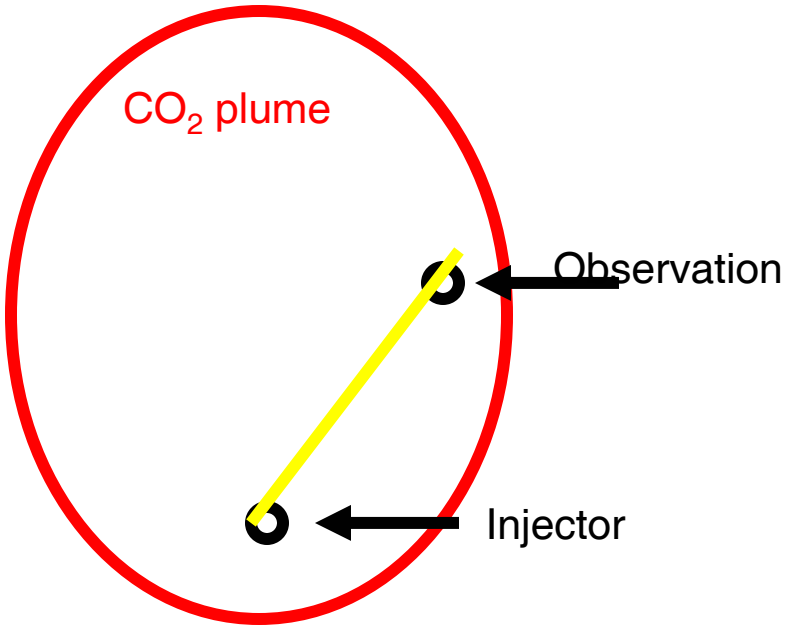

Spatial, temporal information on concentration, chemistry, cross well techniques

Small is Beautiful

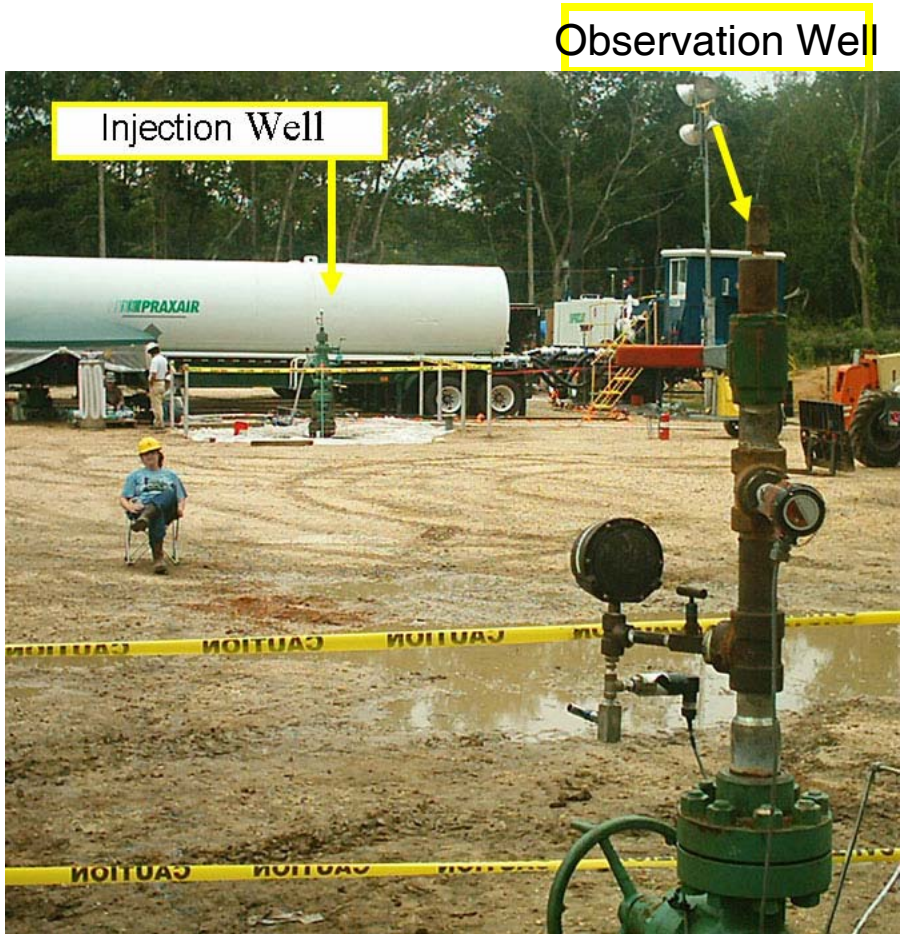

- Closely spaced measurements in time and space
- Emphasis on post-injection period
- High science, low risk

Predicted Saturation Distribution Through Time

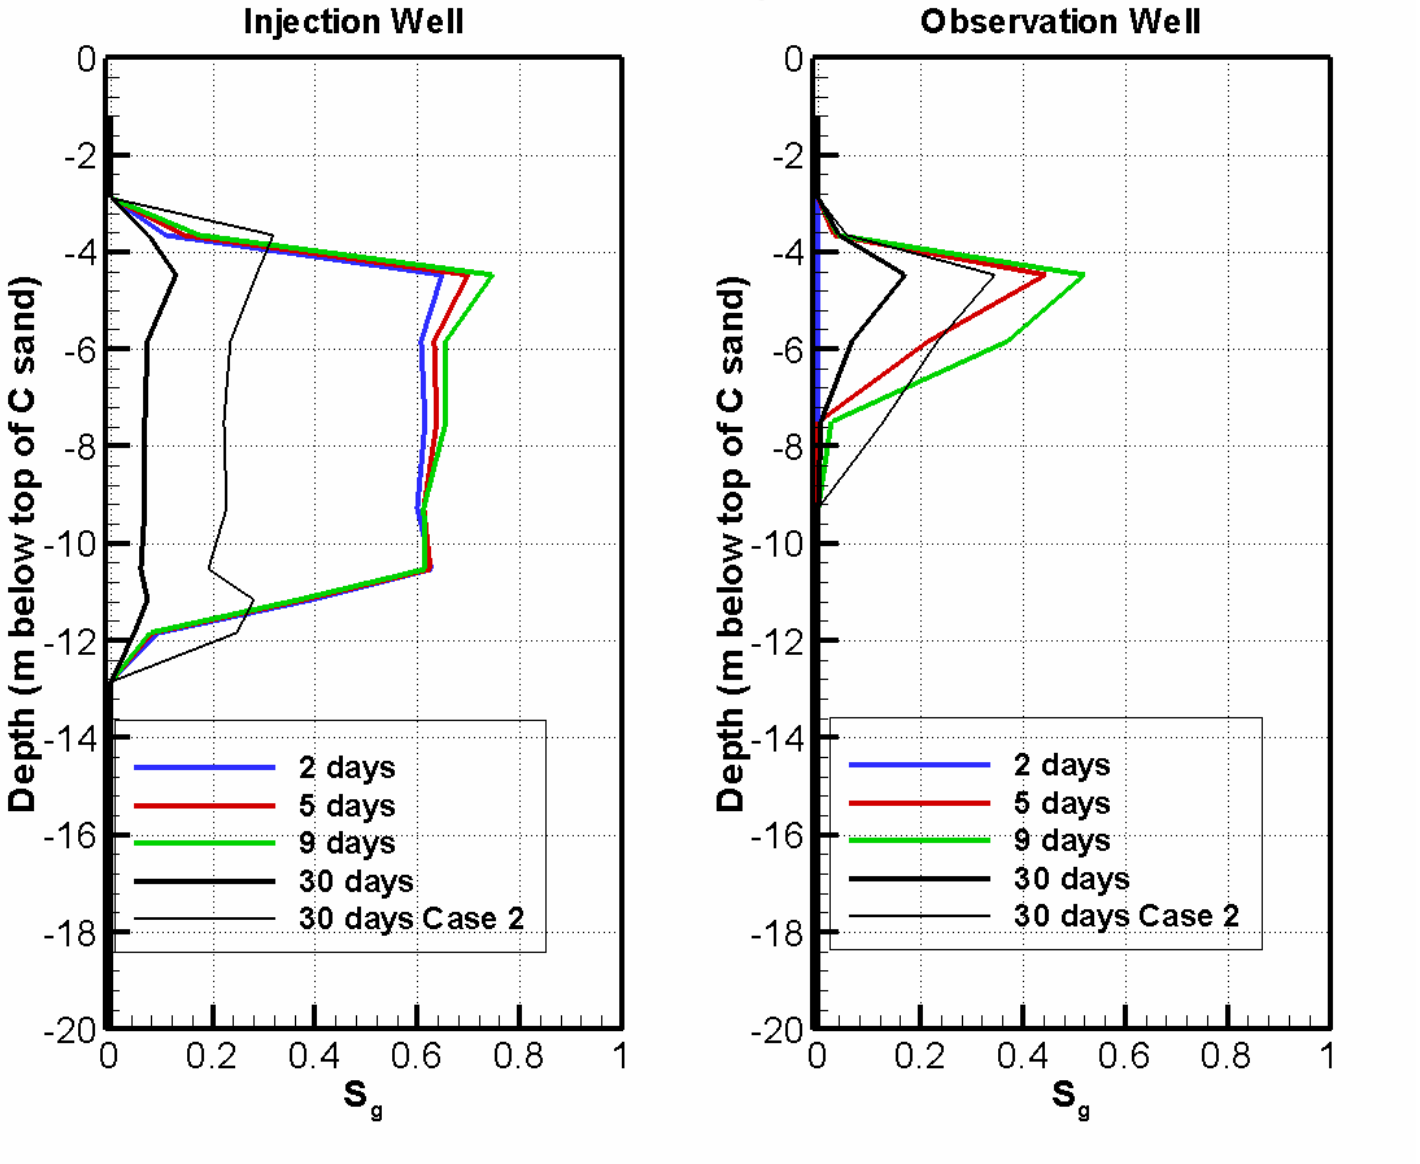

Observed Saturation Distribution Through Time-Injection Well

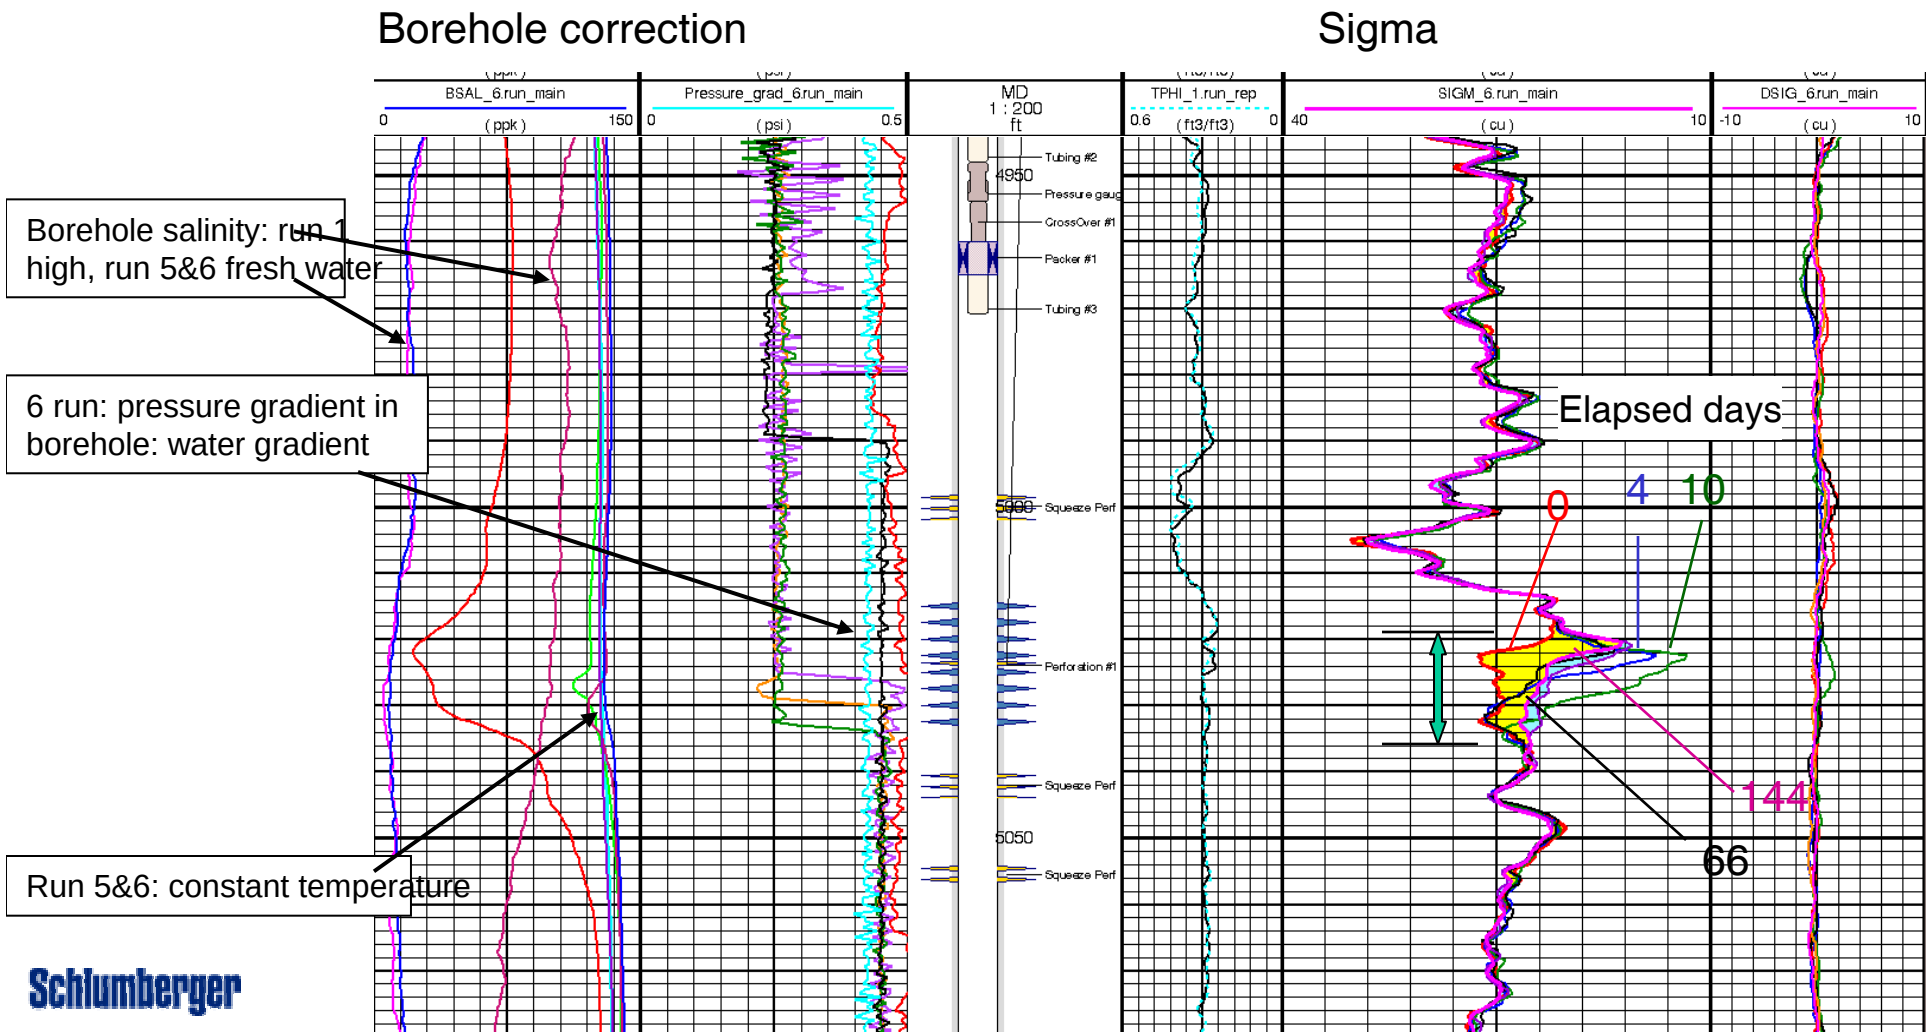

Schlumberger

Tool Selection Appropriate for Goals and Subsurface Environment

- No one tool is “Best”
  - Case specific
    - what is needed?
    - What is possible?
- Interference among tools
  - Geophysics vs. sampling
  - Surface monitoring vs. subsurface sampling

Monitoring at Frio Pilot

Determine the subsurface distribution of injected CO2 using diverse monitoring technologies

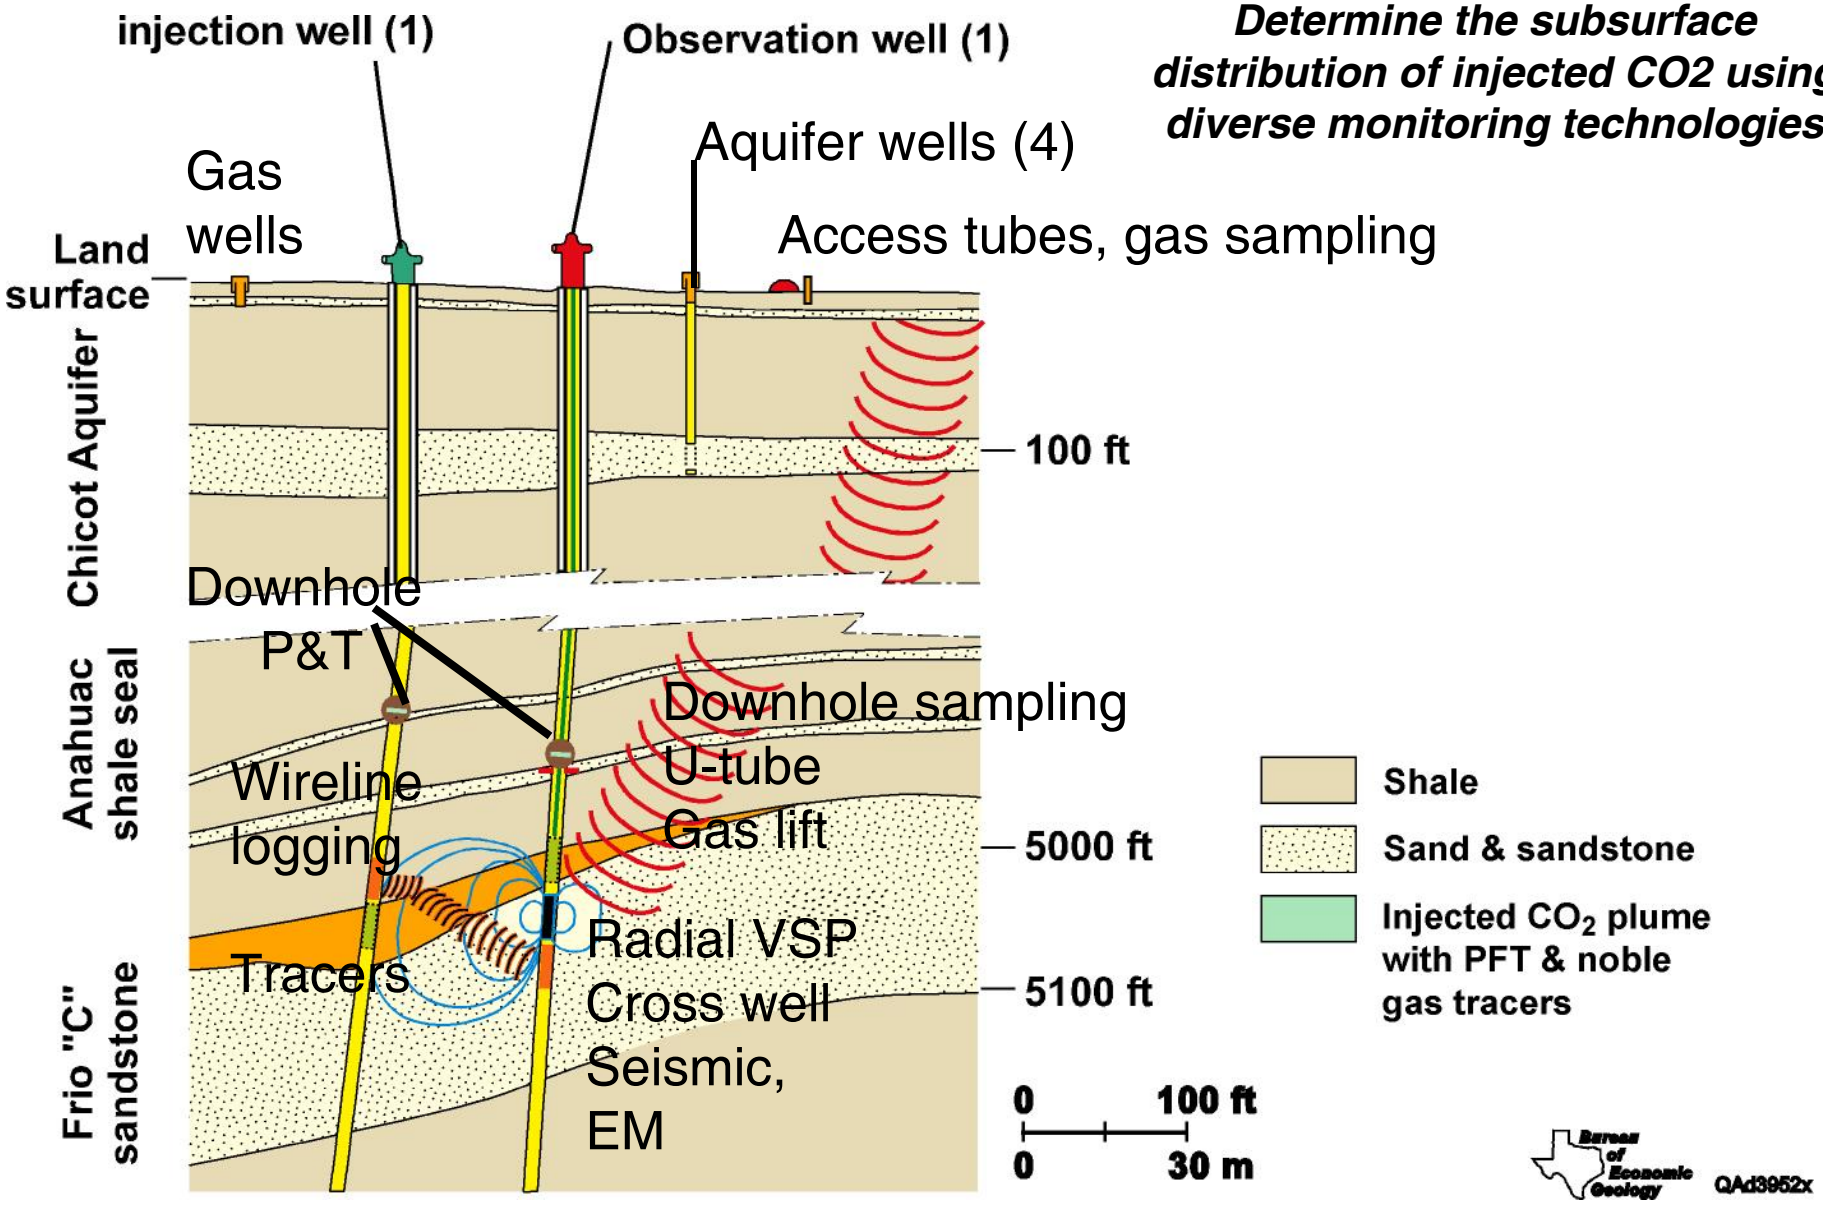

Interference among tests

- Sampling and pressure measurements require wells (open to formation, those in plume produce CO_2, and acid fluid). Geophysics require boreholes, control of wellbore fluids and pressures
- Surface monitoring should be sensitive to detect very small seepage (using tracers for example). Other operations such as surface activities and production of downhole fluids produce large perturbations).

Interference among tests
Invasion by kill fluids

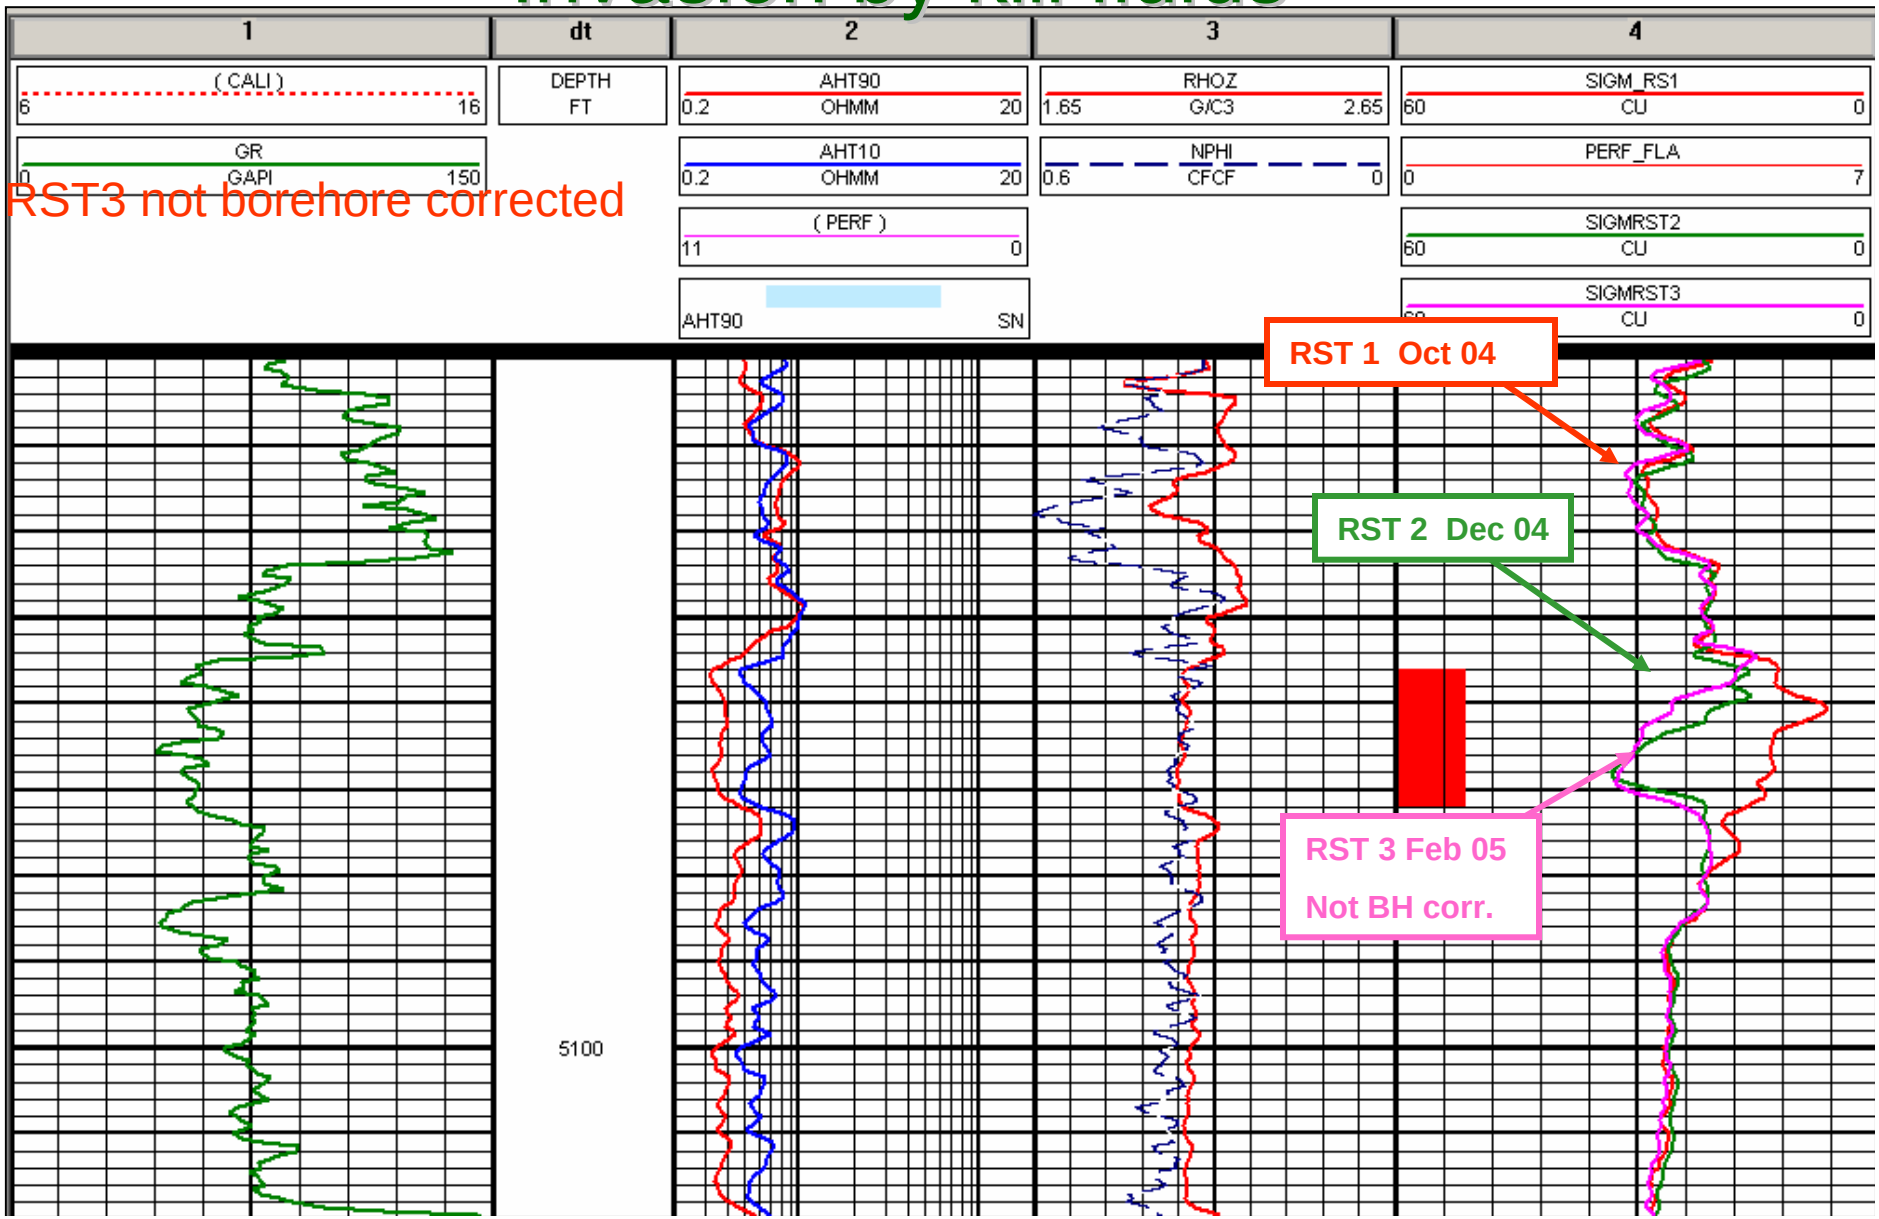

Complexity: Surface Environments

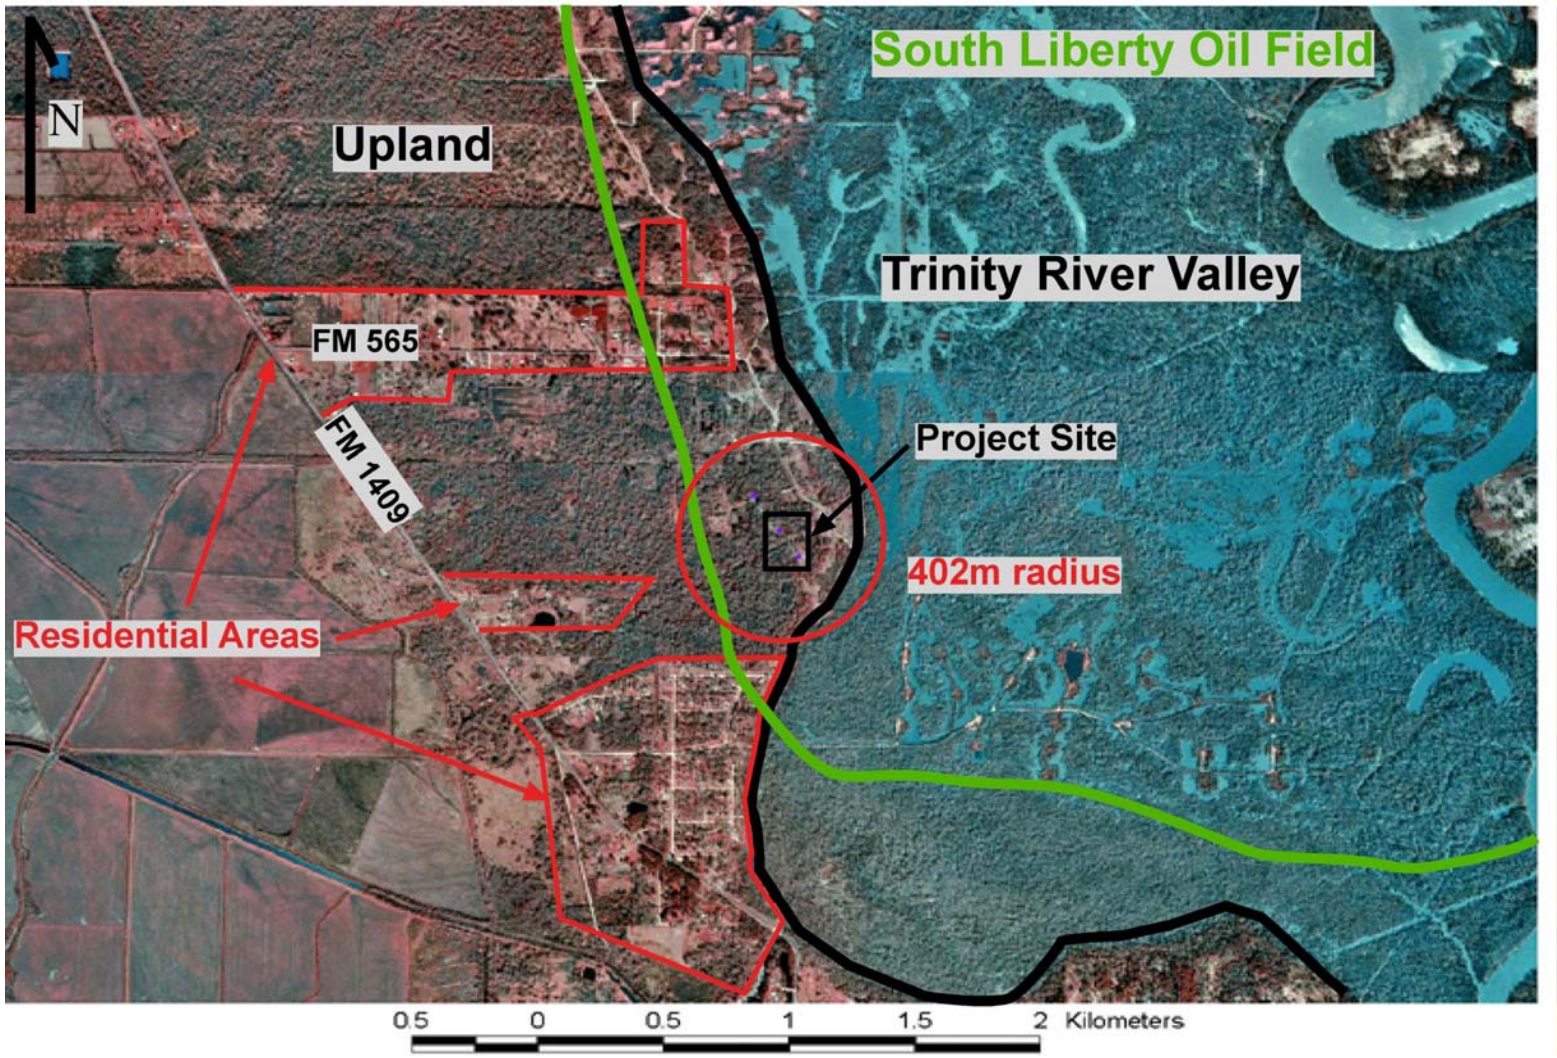

Groundwater Monitoring

- A standard test = high public assurance
- A low-cost test
- An effective test – reduced complexity, integrator of multiple leakage paths

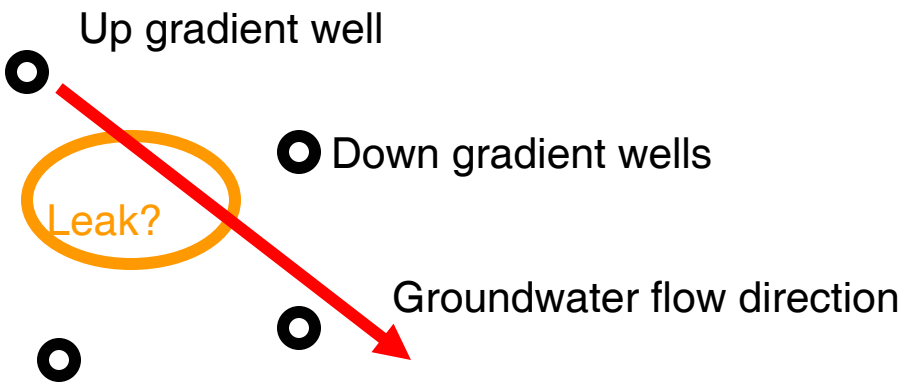

More work needed: experiments not done at Frio

Experiment	why not done?
• Large volume of CO_2	Risk, $
• Interaction with faults	Risk, complex, premature
• 4-D survey	Problematic, $
• Observation well array in zone	$
• Tilt	Problematic, $
• Microseismic array	Problematic,$
• WAG	Interference
• EOR	interference
• EGR	interference
• Streaming potential	$
• Ecosystem impact survey	Problematic, $
• Massive pre-project PR	Problematic
• Legal/regulatory system test case	Problematic

Experiment	why not done?
• During experiment pressure monitoring in overlying brine aquifers, fresh aquifers	Interference
• Ecosystem CO2 flux towers	Problematic, $
• Surface CO2 monitoring lasers	Problematic, $
• Airborne/ satellite monitoring	Problematic
• Dealing with dissolved methane	no plan
• Exhaustive logging	Problematic, $
• Other edgy down hole monitoring (e.g. non-conductive wells)	$
• Long-term monitoring	problematic, $
• Pipeline issues	premature
• Complex gas injection	interference
• Inject low, recover high	$
• Well integrity, special cement	premature
• Long-term geochemistry	$

Problematic = estimated to be unlikely to collect useful measurements at Frio scale, duration, site specific conditions

Interference = interferes with success of another experiment

$ = cost prohibitive in total project context. Might be used in a larger budget project